

Litelines

Catalog #:	
Job:	
Type:	Voltage:

CBSQ1200 Series

Structural

12" square concrete bollard with (6) top cap options and (5) optical choices.

Luminaire

Reflector, louvers and refractors shall provide optimum lighting performance and weathertite operation.

Electrical

Ballast and electrical components are "UL Listed," factory prewired and mounted to a rigid support for suspension within the concrete base. A quickdisconnect electrical plug will be provided for easy installation and servicing.

Surface

The precast concrete shall be available in the following finishes: Mold Finish ("MF"), Sandblast ("SB") or Exposed Aggregate ("EA"). Consult factory for special aggregates and surface textures.


Color

The concrete shall be available in the following standard colors: Natural Grey Cement (N), Brown (BR), White (WH), Dark Bronze (BU), Copper (CO), and Special (SP). Consult factory for other colors.


Mounting

Anchor base bollards "AB" are supplied with plated anchor bolts for installation into a concrete footing.


Dimensions



Mounting

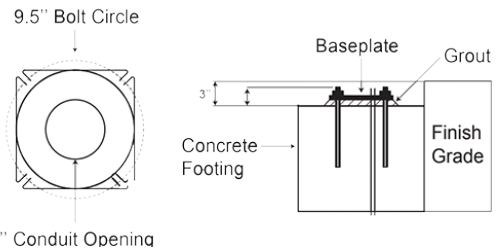

Cap Options

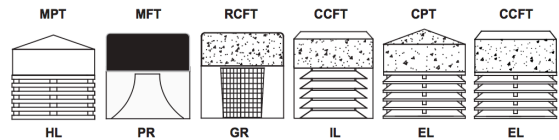

Ordering Information

Ordering Example: CBSQ1200-MPT-HL-150-HPS-120-18-AB-GY-N-MF-HSS

