

# Litelines

Catalog #:	
Job:	
Type:	Voltage:

## TC824 Series

### Structural

A precast concrete stantion utilizing a cast aluminum 4/0 box cover with 1/2" IPS center outlet and secured to cast base with (2) philips head screw fasteners. Exclusive "POLYFLANGE", an injection molded polycarbonate flange eliminates concrete fractures where screws secure cover to casting.

### Electrical

Tapered wiring chamber accepts multiple conduits and eliminates the need for an electrical junction box.


### Surface

The precast concrete shall be available in the following finishes: Mold Finish ("MF"), Sandblast ("LS") or Exposed Aggregate ("EA"). Consult factory for special aggregates and surface textures.


### Color

The concrete shall be available in the following standard colors: Natural Grey Cement (N), Brown (BR), White (WH), Buff (BU), Copper (CO) and Black (BK). Consult factory for other colors.

### Dimensions

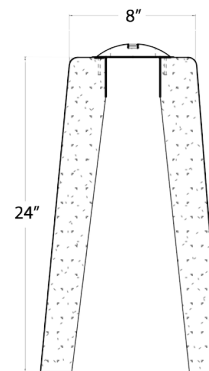

### Mounting

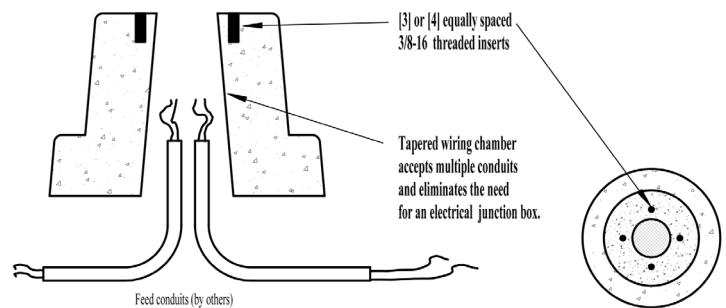

## Ordering Information

Ordering Example: TC824-N-MF-GS

