

Litelines

Catalog #:	
Job:	
Type:	Voltage:

TC836SP Series

Structural

Round concrete bollard cast from natural stone Aggregates, "Portland Cement" and fibrillated fiber. Conforms to ASTM standards.

Luminaire

Metallic components and a sealed white acrylic lens shall provide optimum lighting performance and weathertite operation. Polycarbonate lens is optional.

Electrical

Ballast and electrical components are "UL Listed," factory prewired and mounted to a rigid support for suspension within the concrete base. A quickdisconnect electrical plug will be provided for easy installation and servicing.

Surface

The precast concrete shall be available in the following finishes: Mold Finish ("MF"), Sandblast ("SB") or Exposed Aggregate ("EA"). Consult factory for special aggregates and surface textures.


Color

The concrete shall be available in the following standard colors: Natural Grey Cement (N), Brown (BR), White (WH), Dark Bronze (BU), Copper (CO), and Special (SP). Consult factory for other colors.


Mounting

Anchor base bollards "AB" are supplied with 3/8" plated anchor bolts for installation into a concrete footing (by others). Consult factory for other mounting configurations.

Dimensions



Cap Options

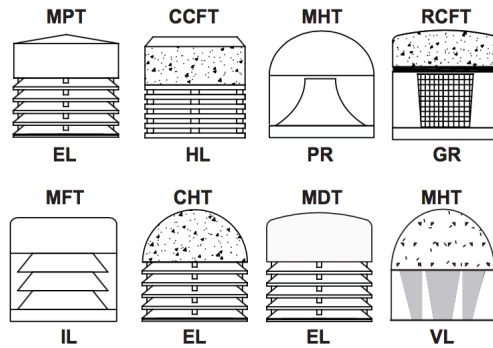

Ordering Information

Ordering Example: TC836SP-8-MPT-HL-150-HPS-120-18-AB-GY-N-MF-HSS

