

# Litelines

Catalog #:	
Job:	
Type:	Voltage:

## TCB2400 Series

### Structural

24" Concrete bollard with (4) top cap options and (5) optical choices.

### Luminaire

Reflector, louvers and refractors shall provide optimum lighting performance and weathertite operation.

### Electrical

Ballast and electrical components are "UL Listed," factory prewired and mounted to a rigid support for suspension within the concrete base. A quickdisconnect electrical plug will be provided for easy installation and servicing.

### Surface

The precast concrete shall be available in the following finishes: Mold Finish ("MF"), Sandblast ("SB") or Exposed Aggregate ("EA"). Consult factory for special aggregates and surface textures.


### Color

The concrete shall be available in the following standard colors: Natural Grey Cement (N), Brown (BR), White (WH), Dark Bronze (BU), Copper (CO), and Special (SP). Consult factory for other colors.


### Mounting

Anchor base bollards "AB" are supplied with plated anchor bolts for installation into a concrete footing.


### Dimensions

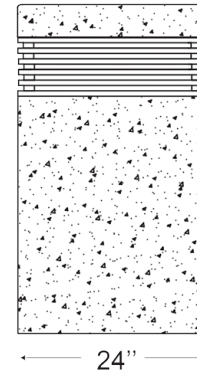

### Mounting

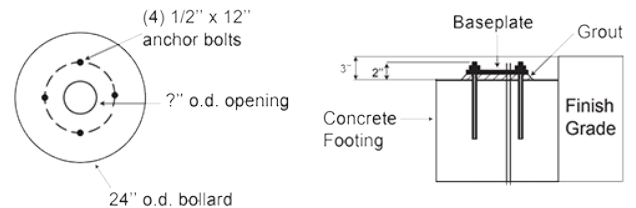

### Cap Options

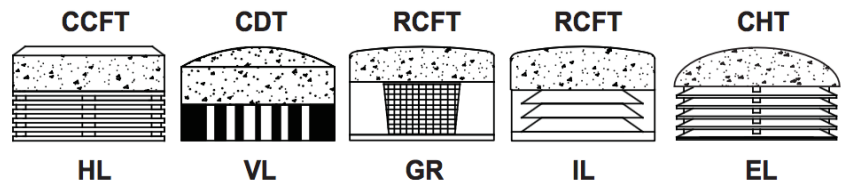

### Ordering Information

Ordering Example: TCB2400-CDT-HL-150-HPS-120-18-AB-NA-N-MF-HSS

